





# 2010ねんろぼこ んのほうこくしょ

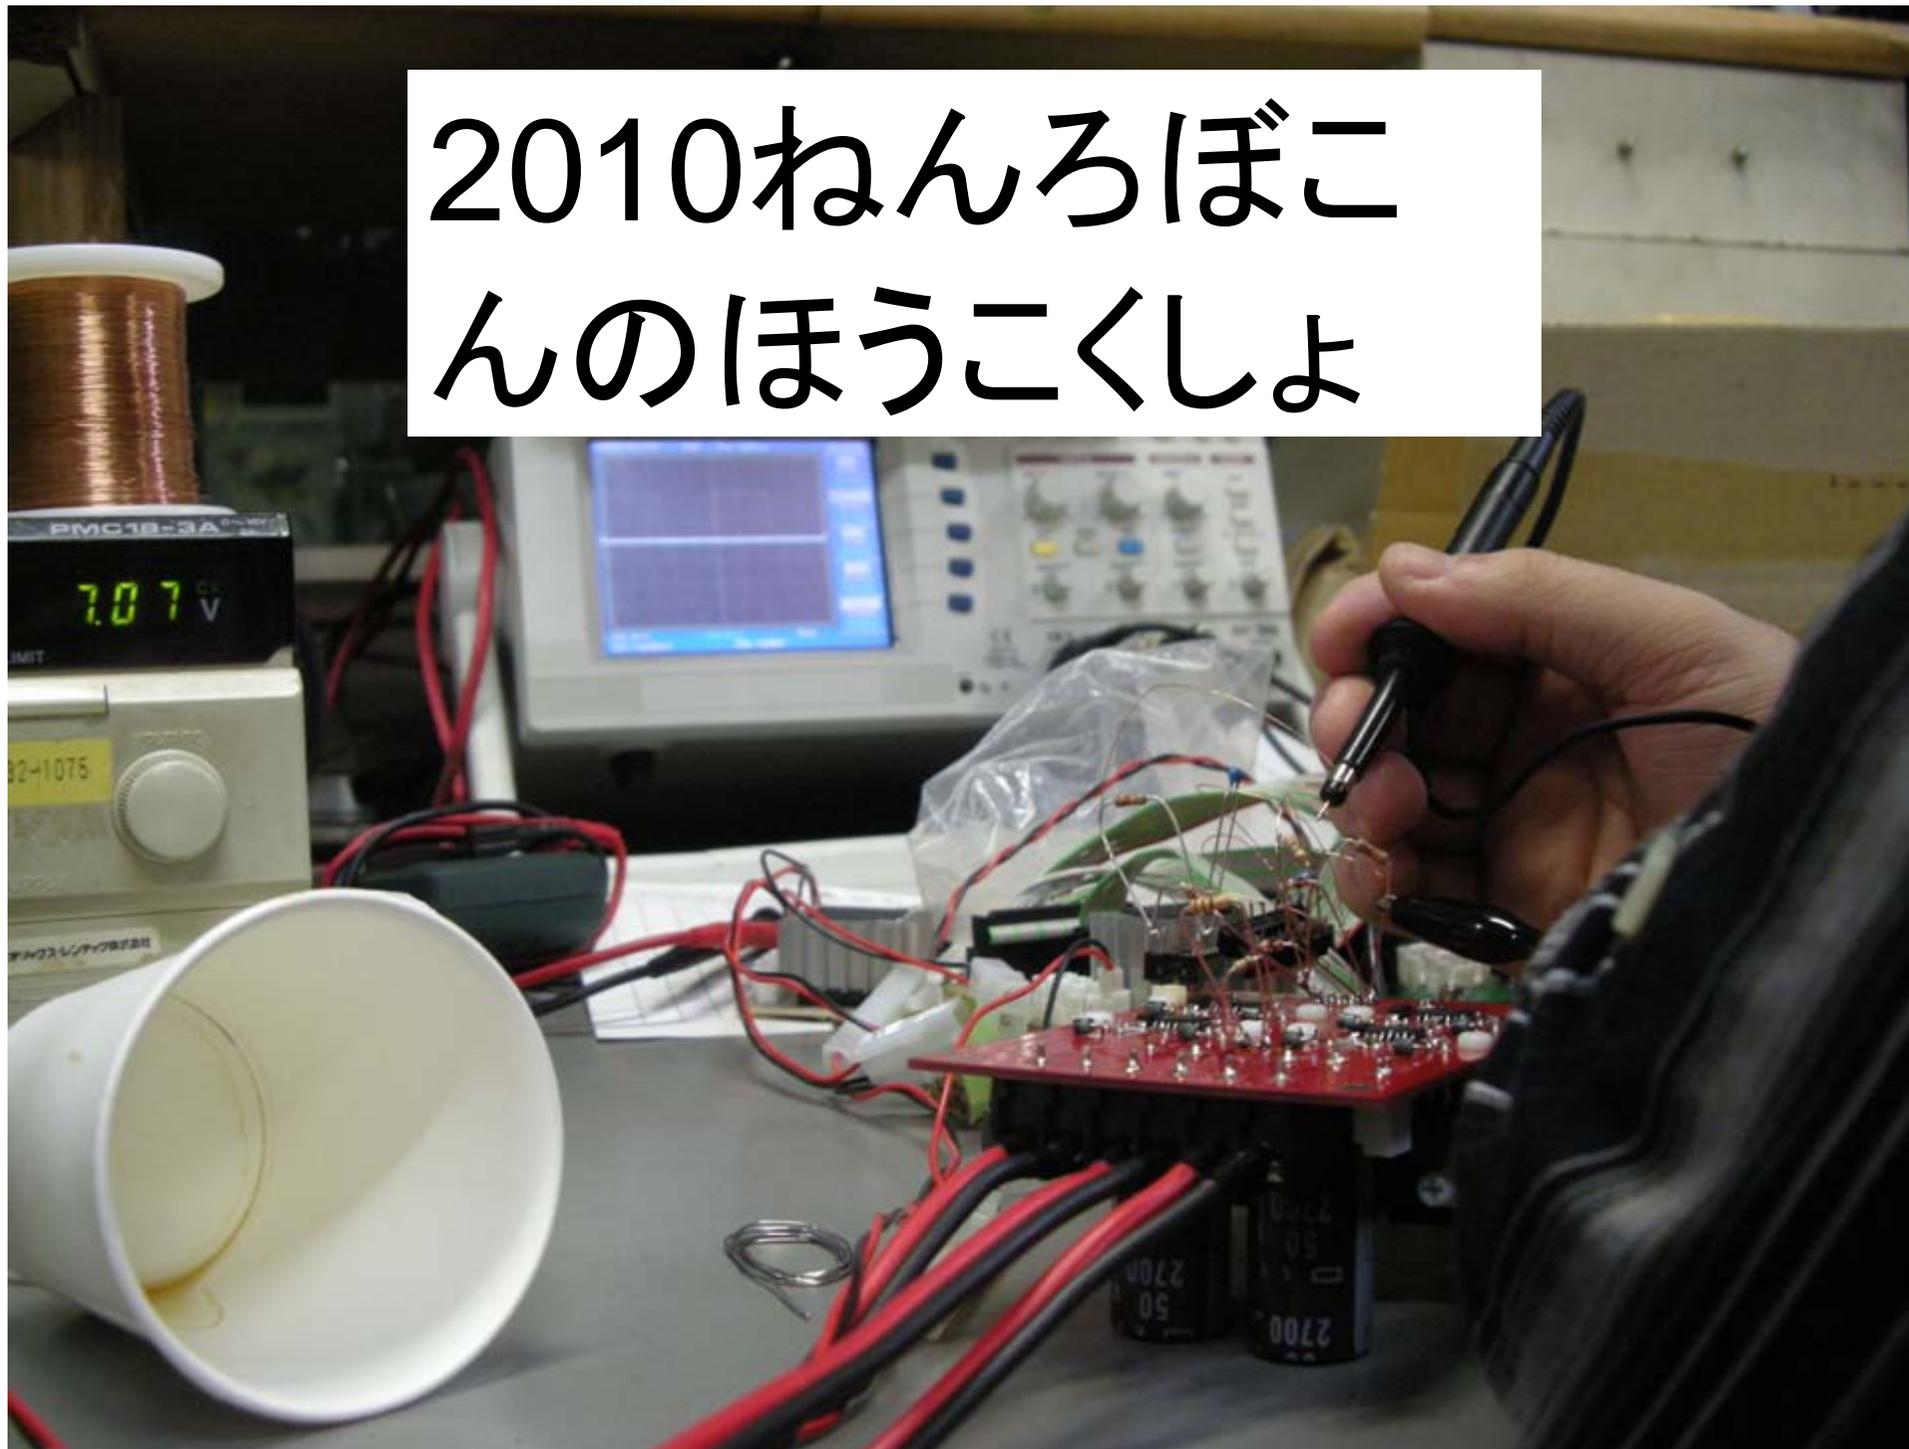


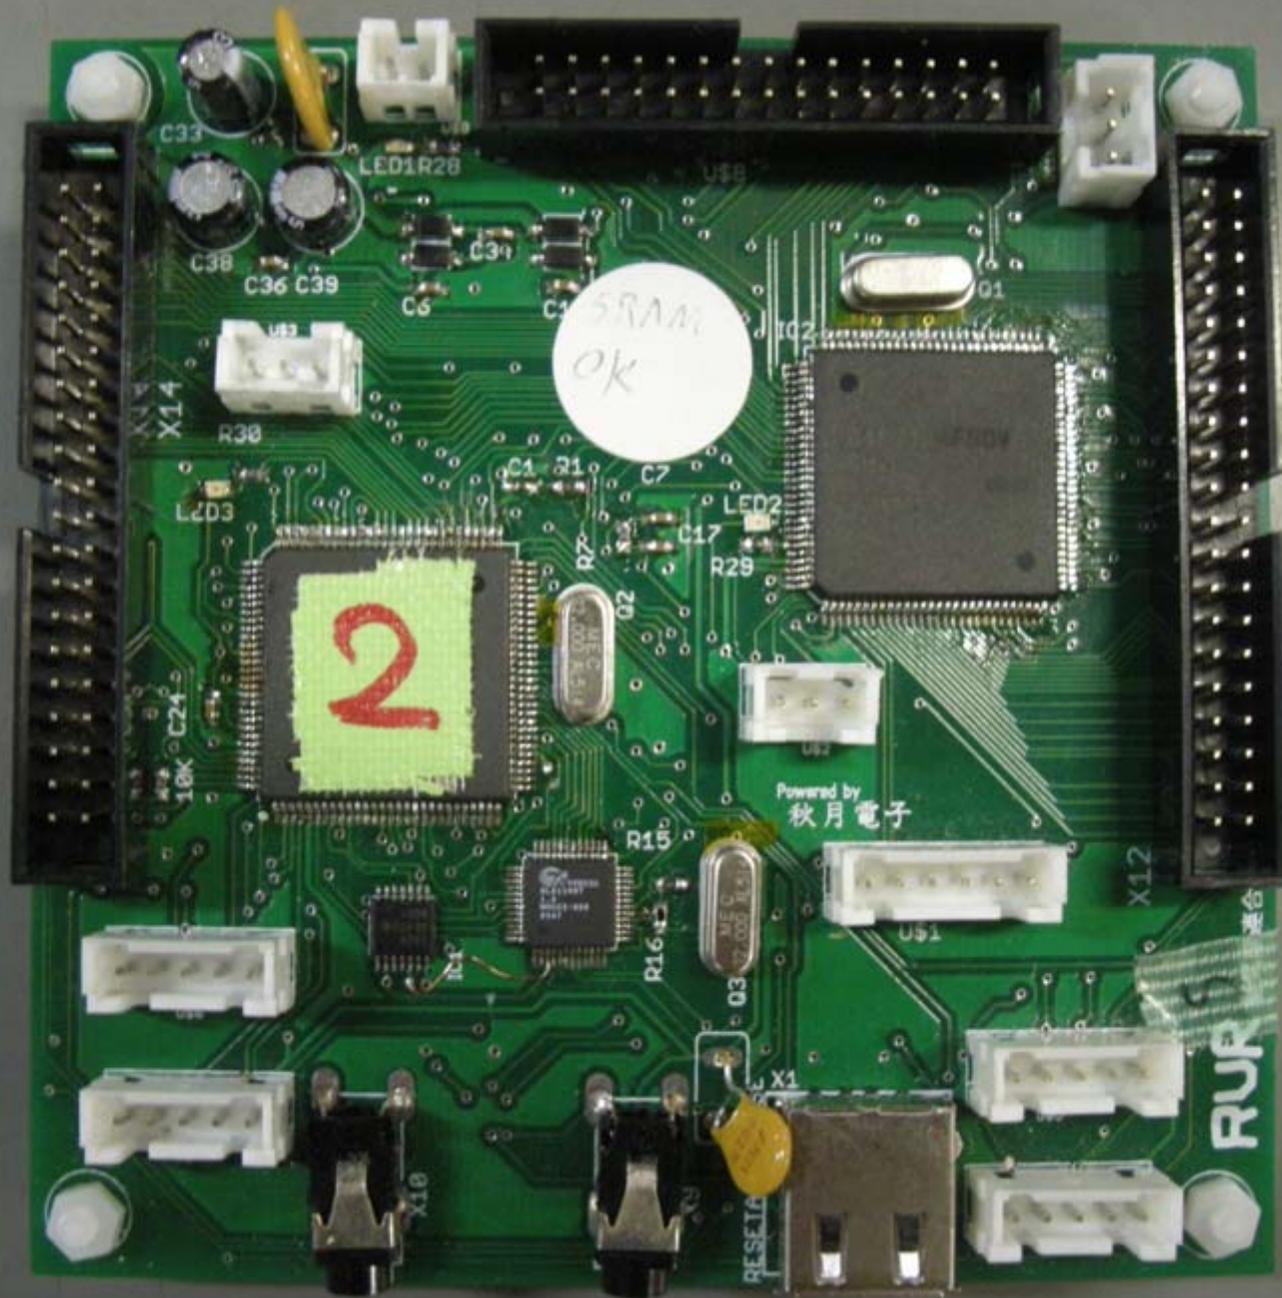

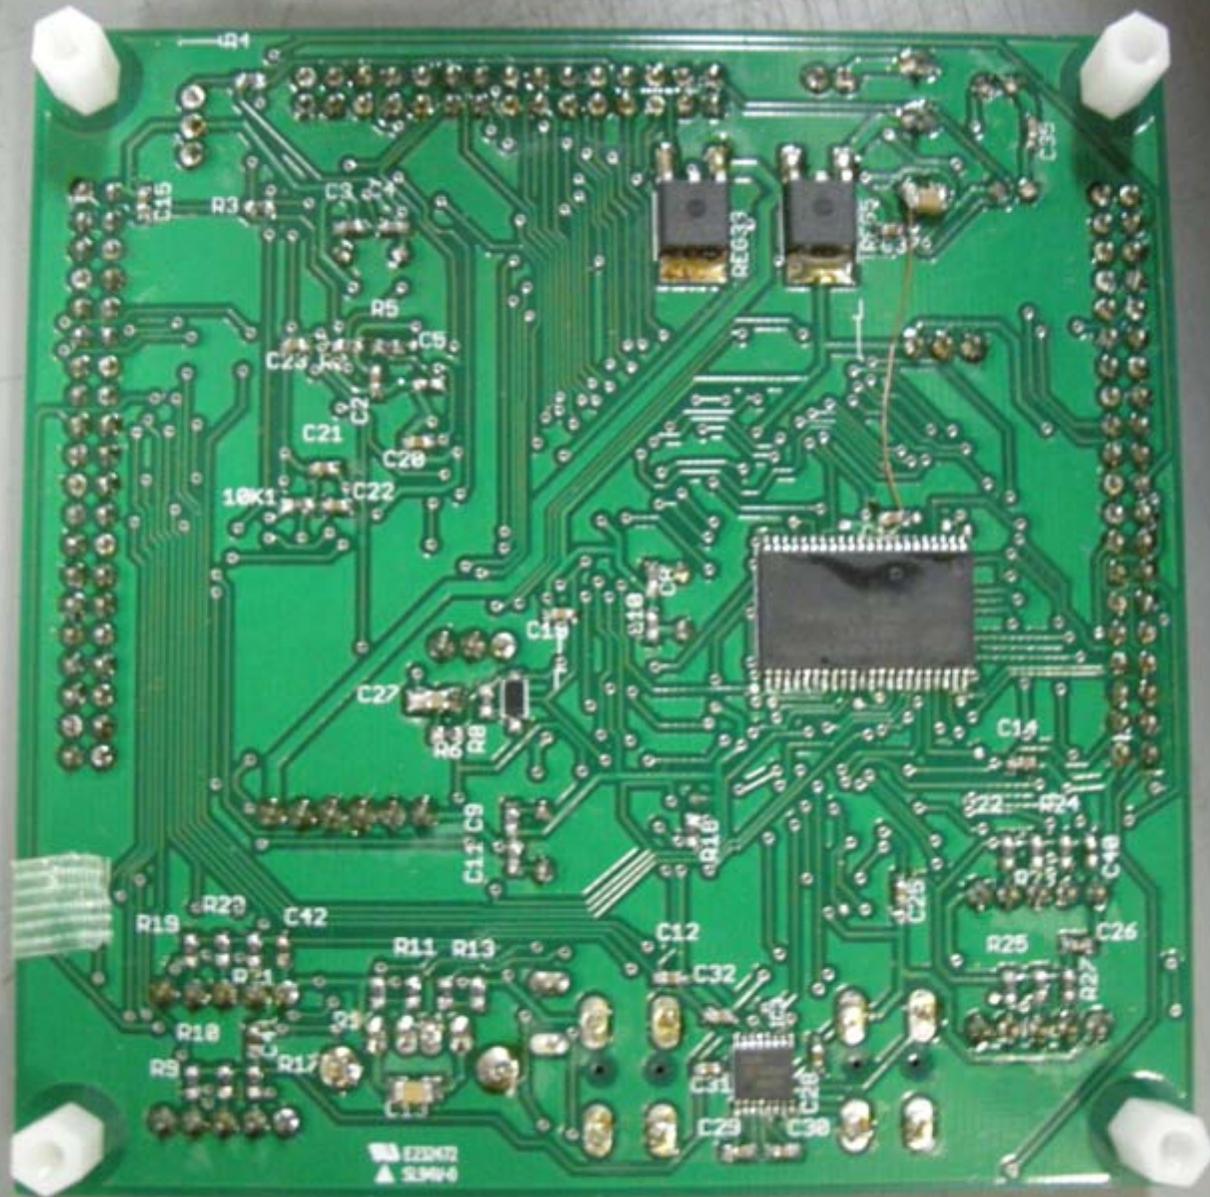


23 E2047  
A 31904

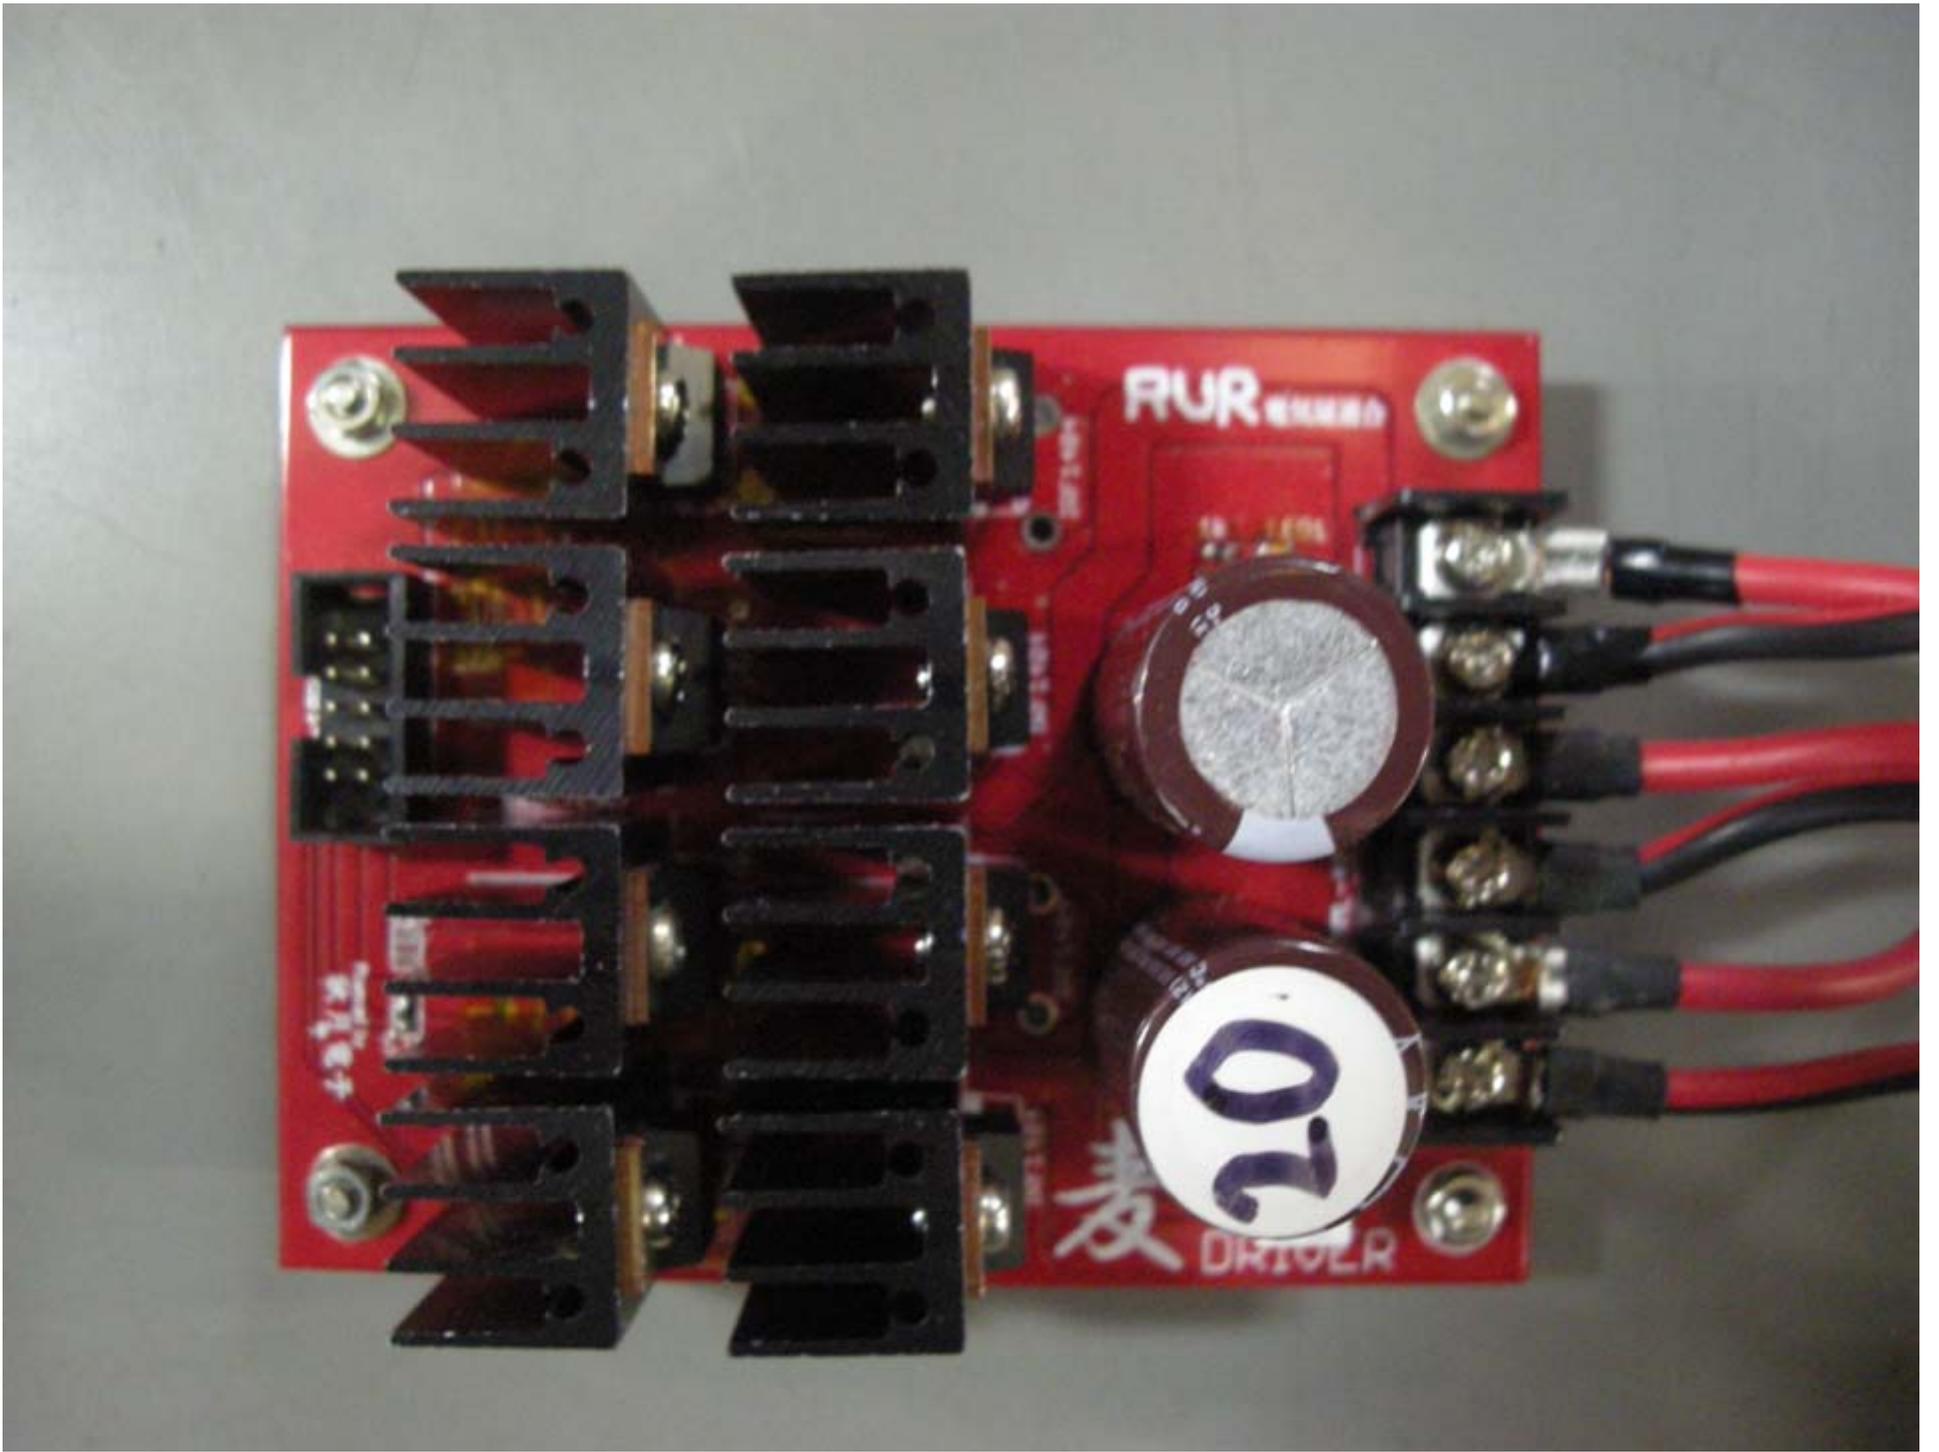

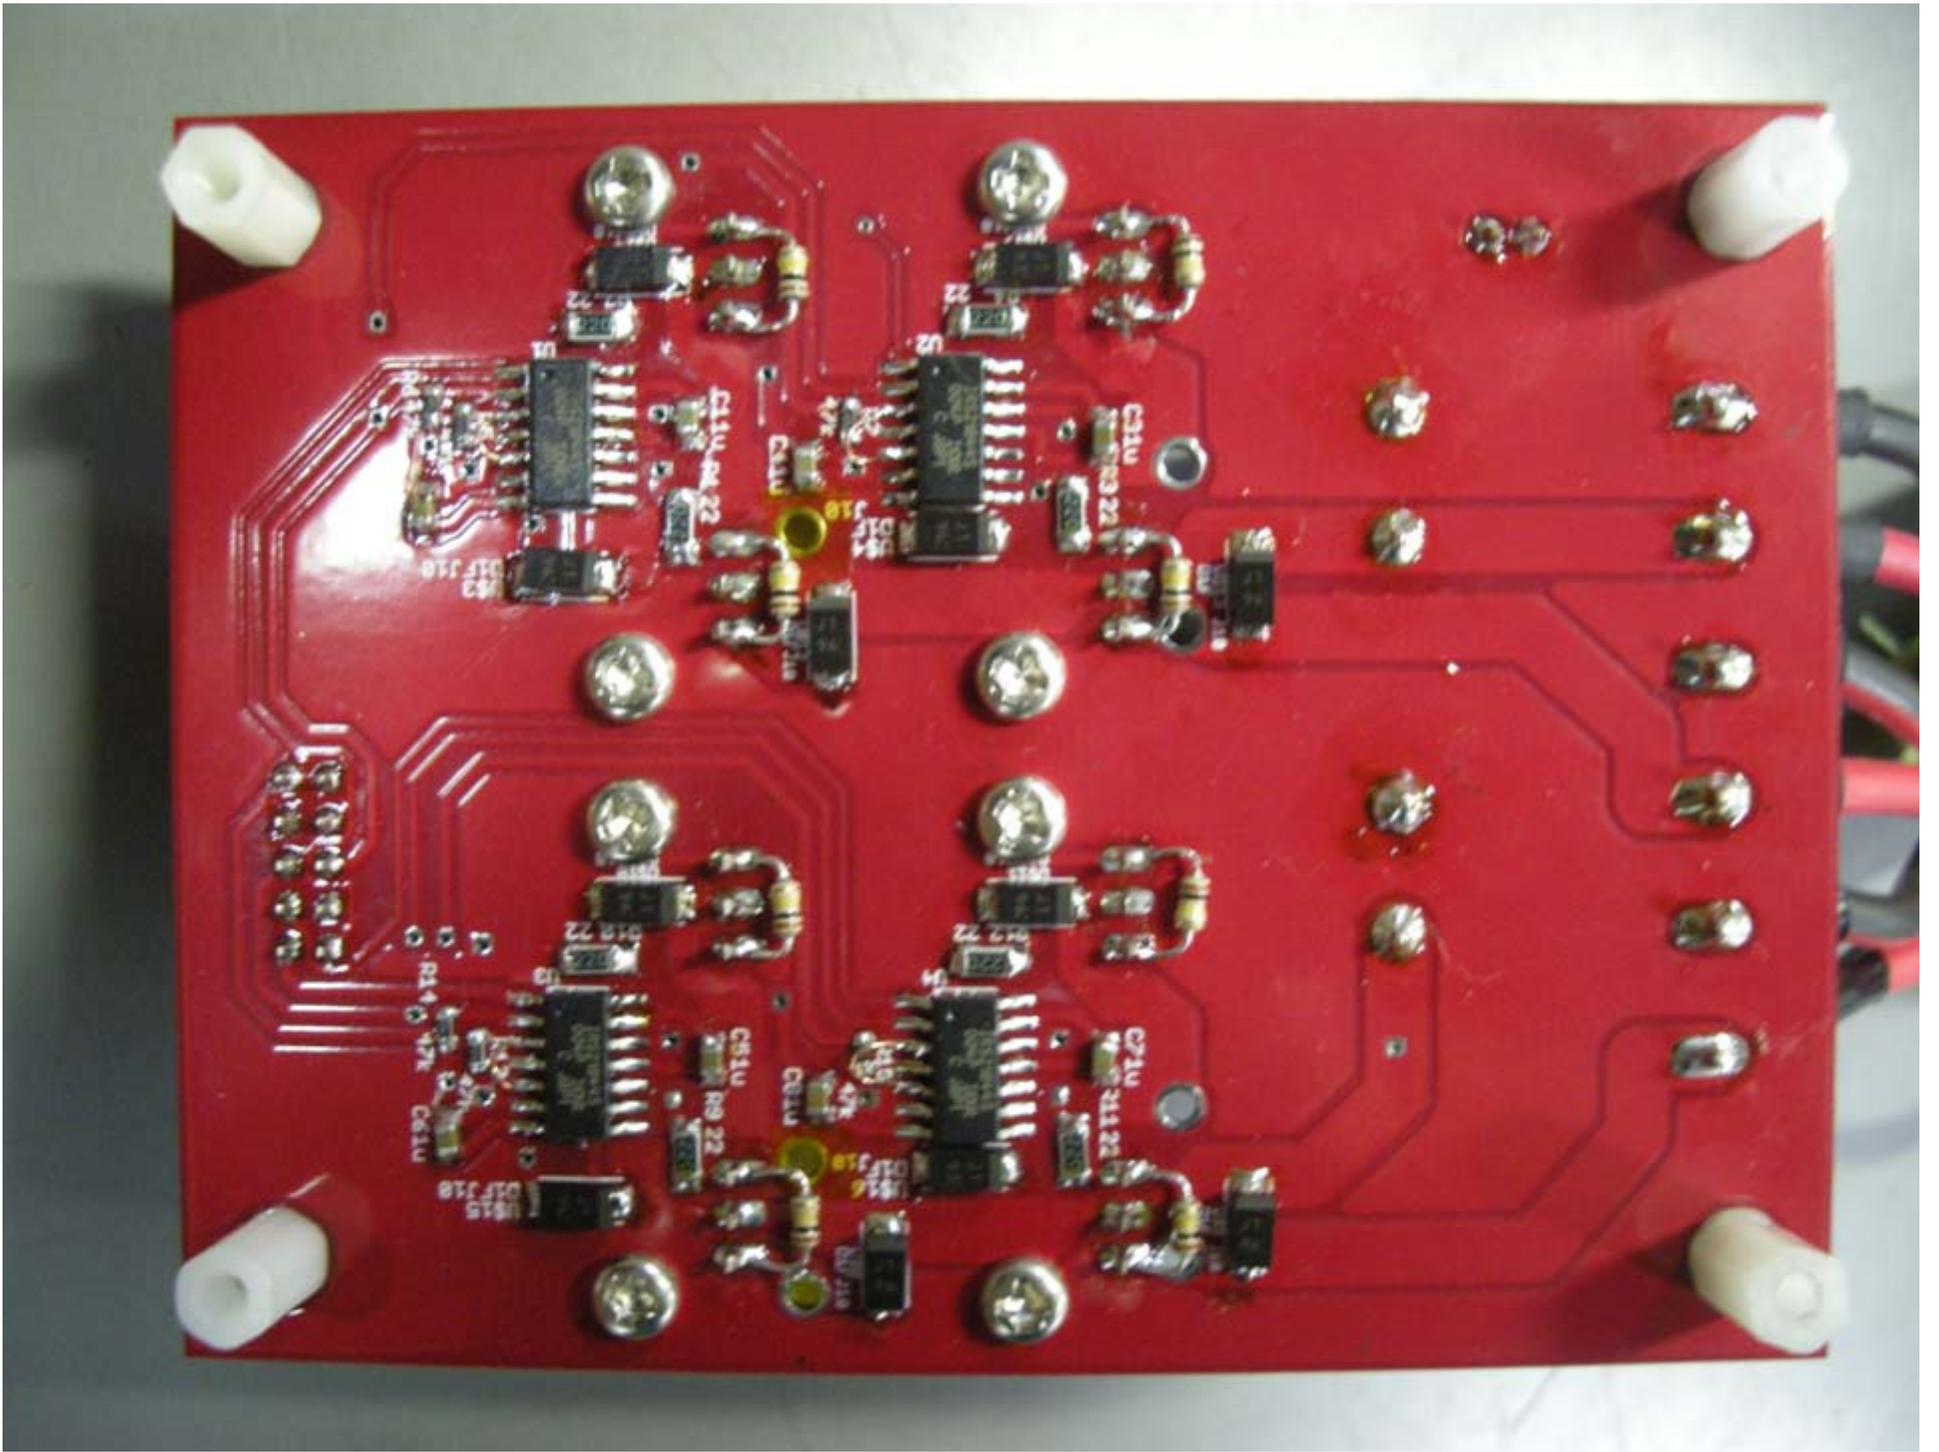

TRG +0.0div      NORM      SM

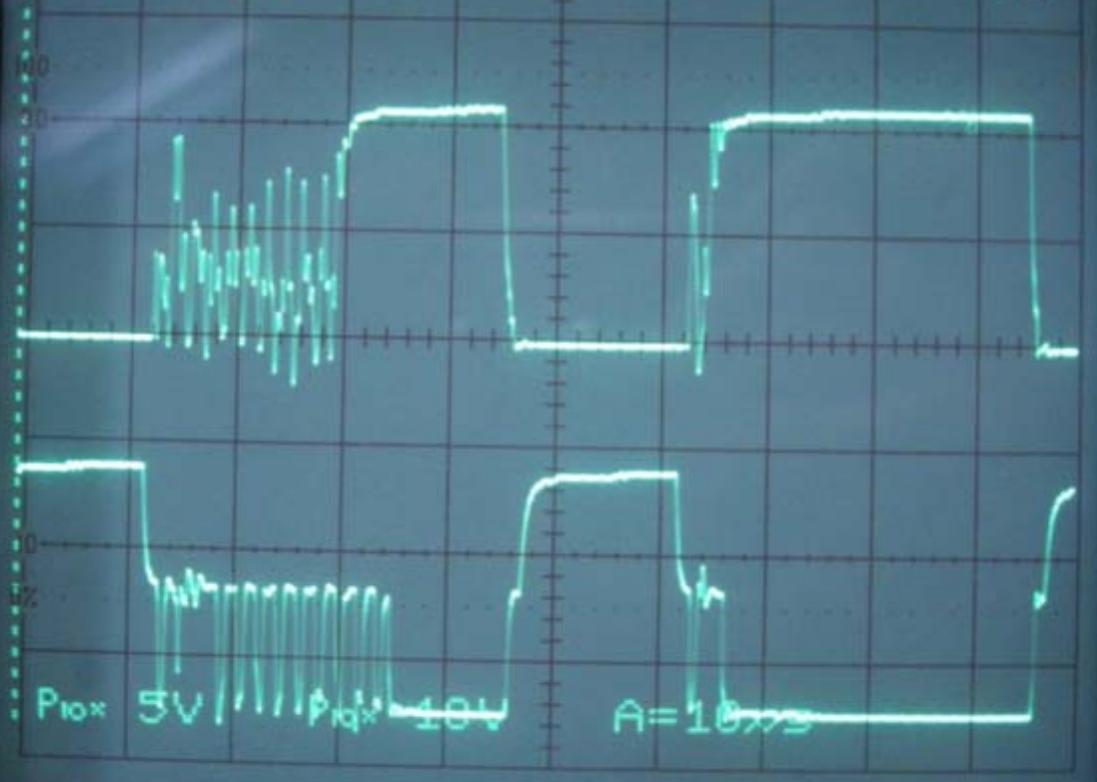

P<sub>10</sub> × 5V      P<sub>10</sub> × 10V      A = 10ns

INTEN

FOCUS

POSITION

VOLTS/DIV

PROBE ADJUST

HITACHI VC-6045  
DIGITAL STORAGE OSCILLOSCOPE

SELECT BY VARIABLES      MENU      PLOT      RECALL      SAVE      HOLD      STORAGE

RUR



PIC SLAVE NORMAL

<< Main Menu >>

- <0>Read from microSD
- <1>Save to microSD
- <2>Received Data from UART
- <3>Include Setting Info
- <4>Edit Setting Info
- <5>Field Debug Mode
- <6>Received Data from I2C

\*

UP

DOWN

ENTER

